


Industrial Cylinder Heated Drying Ironers LSR33

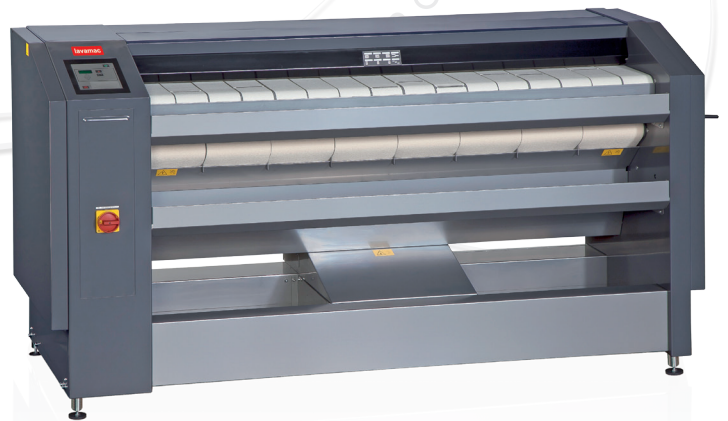

FEATURES


- Large surface contact with linen over an angle of 300°
- Highly polished steel, thin cylinder
 - Reasonable price
 - Rapid response to temperature
 - Excellent thermal conductivity
- Emergency button and Main switch in one
- Finger protection bar for even more safety
- Durable Nomex ironing belts
- Extra heavy press roller for high-quality ironing
- Patented direct drive
 - maintenance-free – system
- Patented central suction system with maintenance-free operation
- Automatic cool down
- Easy to operate microprocessor
- Frequency controlled motor
- Preset temperature indicator
- Space-saving installation against the wall is possible: front return
- Exhaust outlet at back of the machine
- Electric or gas heating
- Metal fibre premix burner (for Gas only)
- Ergonomic design

OPTIONS

- Coin operated version
- Central payment system operated version (CPS)
- Chrome-plated cylinder for better thermal conduction and ironing quality
- Overheating check system (OCS) with 3 temperature sensors
- Pedal of insert table stop system
- Exhaust output on the right
- Fixation set for mounting to the floor

TYPE		LSR3316 E	LSR3320 E	LSR3316 G	LSR3320 G
ROLLER DIAMETER	mm	320	320	320	320
USEFUL ROLLER LENGHT	mm	1664	2080	1664	2080
CAPACITY*	kg/h	62	70	58	72
SPEED	m/min	1-6			
HEATING					
Electric	kW	24.3	27.9		
Gas**	kW			25	30
MOTOR					
Roller motor	kW	0.18	0.18	0.18	0.18
Fan motor	kW		0,095 (50 Hz) / 0,125 (60 Hz)		
Others	kW	0.08			0,17
Max. temperature	°C		180		
Consumption of electricity	kWh	21,4	27,3		
Consumption of gas	m³/h			2,62	3,13
Gas types				G20, G25, G30, G31, G110	
Max. gas pressure	mbar			60	
Noise level	dB (A)			< 57	
Ingress protection				IP42	
ELECTRIC CONNECTION		3x380-415 V +N 50/60 Hz 3x208-240 V 50/60 Hz 3x380-415/440 V 50/60 Hz 1x208-240 V 50/60 Hz			
DIMENSIONS					
HxWxD	mm	1110x2084x755	1110x2500x755	1110x2084x755	1110x2500x755
Netto weight	kg	435	490	410	465
Carton packing HxWxD	mm	1260x2190x800	1260x2610x800	1260x2190x800	1260x2610x800
Brutto weight	kg	485	560	465	540

* According to ISO 9398-1, ** For the G20, 20 mbar

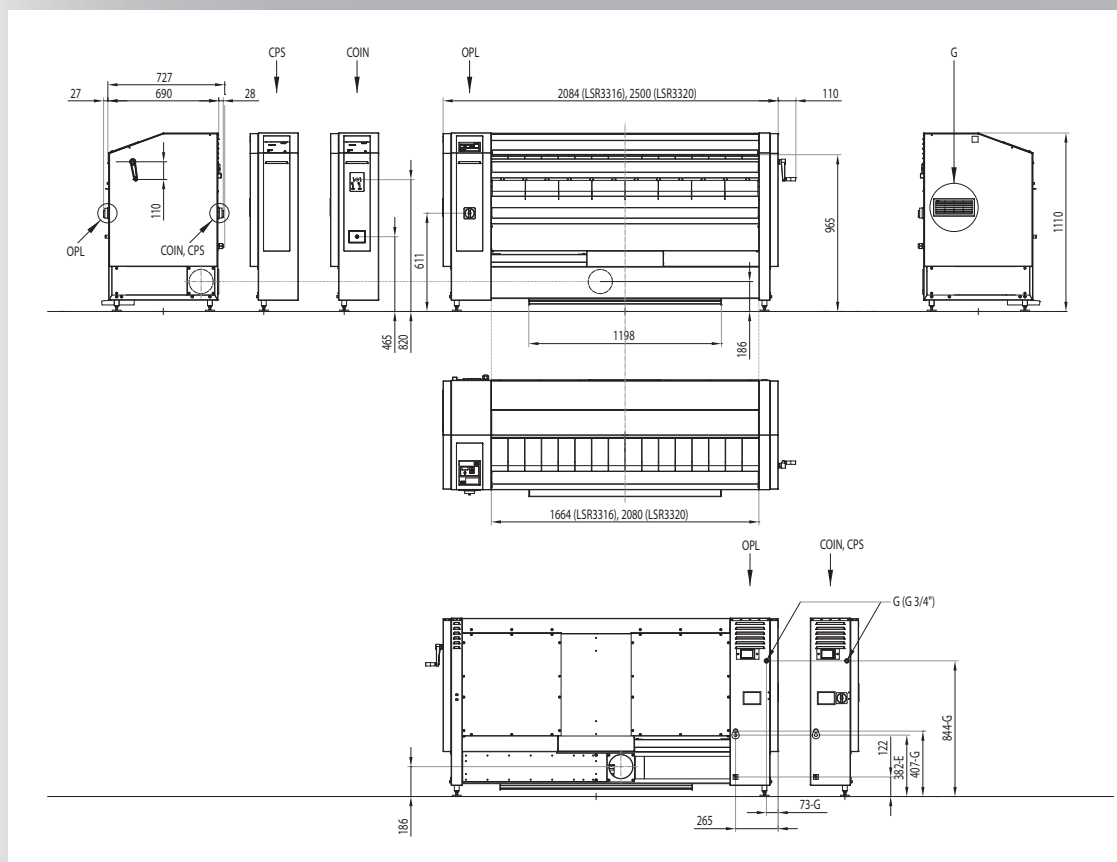

Lavamac preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.lavamac.eu



01 - 2015 / 541060